

Powerful. Reliable. Maneuverable.

M30 MaxBlast Gas Jetter



Get more power—and range—without sacrificing maneuverability. A reliable Honda motor lets the pump deliver up to 4.5 gpm @ 3,000 psi. Removable reel allows remote jetting. Attach a rotating nozzle and take on roots.

- **Automatic throttle down** and **auto choke** help the motor run efficiently, EZ start by-pass.
- **Removable reel** with ball valve flow control mounts onto stand for indoor jetting.
- **Durable brass pump** has thermal protection and pulsation control valve.
- **Removable splash shield** protects motor.

We design all our jetters so they are easy to load, easy to maneuver, easy to maintain and easy to use. Made in the USA with factory-direct support.



MyTana Jetter Standards

Industrial pump and motor with protection and accessible controls

Anti-vibration

Can be customized

Complete nozzle selection

Factory direct support

Parts selection available online for field repairs

QUICK VIEW M30


LINE SIZE	1 ½" - 6"
MOTOR	390 cc gas w/ electric start
PUMP	4.5 gpm @ 3,000 psi



www.MyTana.com ■ (800) 328-8170

M30 Specs

SYSTEM OVERVIEW	
TYPE	Portable, cart jetter
LINE SIZE	1.5" - 6" (with 1/4" and 3/8" hose)
WORKING PRESSURE @ PUMP	Up to 3,000 psi
FLOW RATE	4.5 gpm
APPLICATION	All obstructions with specialty type of blockage type of blockage
MOTOR	
TYPE	Gas (Honda iGX series) 3 year warranty
POWER (HP/CC)	11.7 hp / 390 CC
STARTER/RECHARGE	Electric, key 10 amp recharger built-in Auto choke
MOTOR/PUMP COUPLING	Direct drive
CART FRAME	
STYLE	Pump and motor housed on transport cart that holds hose reel Hose reel is removable, has attachable stand
FINISH	Steel, powder-coat finish
WHEELS	Smooth tread pneumatic – rear: (2) 10" – front: (2) 3" swivel w/locking casters
OPERATING WEIGHT	190 lbs
DIMENSIONS	21" w x 32" d x 48" h

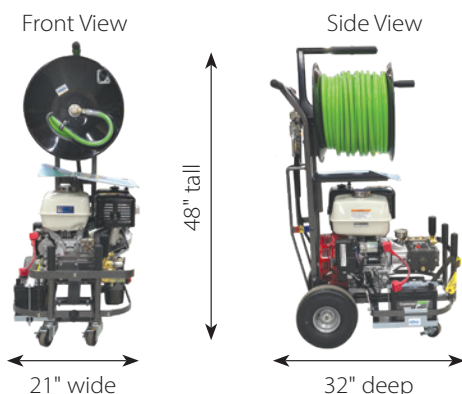

PUMP	
TYPE / HEAD	Triplex Ceramic plunger Brass head (nickel plated)
FILTER	Replaceable – available online
MAX WATER TEMP	140° HotBox allows 180°, downstream from pump

HOSE REEL Optional with base purchase	
MAIN REEL CAPACITY	200' of 3/8" jetter hose
FEATURES	Ball valve on reel Removeable, mates with reel stand for remote jetting Quick disconnect fitting Hand crank

HOSE Optional with base purchase	
BRAND	Piranha®
MATERIAL	Reinforced thermoplastic tube Abrasion resistant, polyurethane jacket
WORKING PRESSURE	4,000
BURST PRESSURE	12,000
TEMP RATING	150° (140° w/ pump)
REQUIRED FOR OPERATION	
WATER SOURCE	Household supply at 4.5 gpm (min. 5/8" garden hose)

ADDITIONAL FEATURES

Motor

1.6 gal fuel tank
Low-oil shut off
Automatic throttle down
Thermal protection

Pump

Pressure regulator / unloader with heavy duty gauge
Pulse valve control
Thermal protection

Frame

Balanced Weight
Easy tilt (up to 30°)
Removeable splash guard shield over motor
Stair glides



Learn more

See the M30 online at
mytana.com/product/m30



012422

(800) 328-8170
M-F | 7a to 5p CST

[MyTana.com](https://mytana.com)

EMAIL mytana@mytana.com



youtube.com/videoMyTana

MYTANA LLC 746 SELBY AVE • ST. PAUL, MN 55104