MyTana

PGR200
Mainline Inspection System

The PGR200 Inspection System includes the CBX17 Monitor-Control Box with a large 12" daylight readable screen. The highly maneuverable frame lets you position it right next to the access.

- **Compact, rugged frame** has a reel brake with adjustable drag to control deployment.
- **Agile** Balanced weight and anti-skid feet make it easy to tilt and maneuver for positioning or transport.
- **Monitor mount** gives full swivel for CBX17 and is tilted for optimal viewing angle.
- **Versatile** The CBX17 can also connect to our Mini Push Cam so you can inspect 1½" - 3" lines, see back for details.

MyTana inspection systems hold up in harsh operating environments.

All MyTana inspection systems feature:

TOUGH CAMERA HEADS with 512Hz transmitter built-in.

DAYLIGHT-READABLE MONITORS display clear, color imagery.

WIRELESS STREAMING to mobile devices*, digital recording. *(*not available on DrainTracker)*

RUGGED YET LIGHTWEIGHT FRAMES – highly portable and maneuverable.

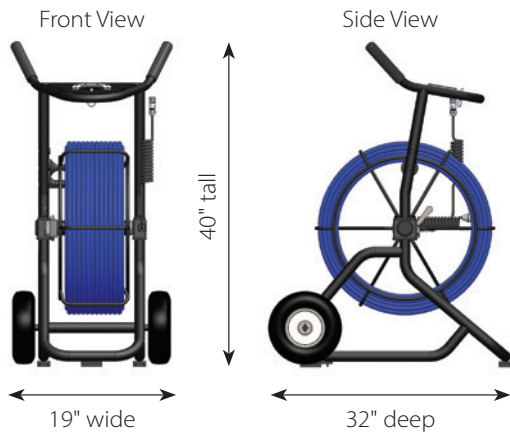**DURABLE PUSH ROD** resists kinking, field replaceable on mid-size and larger models.

Complete Systems | Complete Support

Manufactured in the USA with factory-direct service and support.

www.MyTana.com ▪ (800) 328-8170

PGR200 Specs

SYSTEM	
LINE SIZE	Inspects 3" - 8" lines
RECORDING	Digital – USB, internal memory, wireless streaming
MOBILITY	Balanced weight Monitor/control box mounts easily
POWER	Household power (extension cord needed) Rechargeable battery

FRAME AND PUSH ROD	
FRAME	Powder-coated steel construction Reel brake with adjustable drag Easy tilt, balanced weight and anti-skid feet for easy transport and precise positioning Monitor mount gives full swivel
PUSH ROD	200' x 1/2" dia. Durable, field replaceable Smooth, low-friction coat reduces catching
TOTAL WEIGHT	68 lbs w/o control box 81 lbs w/ control box
SIZE	19" w × 32" d × 40" h – w/o monitor attached

Front View   Side View

40" tall

19" wide   32" deep

Mini Push Cam Optional

Requires the CBX17 Control Box. Has a mini camera head and 100' of mini push rod to inspect 1½"-3" lines.

- Camera head: 1¹⁄₁₆" dia., color, fixed-position, stainless steel, 512Hz transmitter built-in
- 20 lbs
- 12" w x 16" d x 17" h

CAMERA HEAD	
CONSTRUCTION	Stainless steel, flexible neck Screw-on/off connection to push rod Color, self-leveling 512Hz transmitter/sonde built in Adjustable LED lights (adjust on control box)
SIZE	1½" dia.
PROTECTION	4 sizes of ice balls guide, center and protect
INGRESS PROTECTION	Submersible

MONITOR / CONTROL BOX – CBX17	
DISPLAY	10" × 7.5" / 12" diagonal Color, high-contrast, daylight readable Digital footage counter File management menu Title and text overlays on screen and recording – editable w/USB keyboard (not included)
STORAGE	64GB internal memory USB removable drive
PORTS	Dual USB ports – one can be used for router
AUDIO	Microphone for voice overlay on recording Built-in speakers
CONTROLS	Power, sonde transmission and footage reset buttons are stainless-steel Water resistant membrane protection on video control buttons Rheostat control for LEDs

INCLUDES

- 16GB USB removable drive
- Router for WiFi streaming
- 4 sizes of Ice Ball protective guides, field interchangeable
- Factory-direct support

Optional Accessories

- Push-rod splash cover

Viewer App

Connects your mobile device to the CBX17 Control Box so you can stream footage wirelessly and save imagery to the phone or tablet. Search "MyTana" in the App (iOS) or Play (Android) store.

Learn more

See the PGR200 online at mytana.com/product/pgr200