



M30 MaxBlast Gas Jetter

Get more power—and range—without sacrificing maneuverability. A reliable Honda motor lets the pump deliver up to 4.5 gpm @ 3,000 psi. Removable reel allows remote jetting, attach a rotating nozzle and take on roots.

- **Automatic throttle down and auto choke** help the motor run efficiently, EZ start by-pass.
- **Removable reel** with ball valve flow control mounts onto stand for indoor jetting.
- **Durable AR pump** has thermal protection and pulsation control valve.
- **Removable splash shield** allows access to motor and protects it from drips.

We design all our jetters so they are easy to load, easy to maneuver, easy to maintain and easy to use.



M30 At-a-glance

LINE SIZE 1½" - 6"

MOTOR Gas - 390 cc
w/ electric start

PUMP 4.5 gpm @ 3,000 psi

All MyTana portable jetters feature:

QUALITY, RELIABLE PUMPS AND MOTORS with thermal protection and accessible controls

PULSE VALVES on all pumps

RUGGED FRAMES which emphasize ergonomics, portability, maneuverability, and stabilization during operation

EASY MAINTENANCE on all components (parts are available for field repairs)


Powerful. Reliable. Maneuverable.

MyTana jetters are manufactured in the USA and include factory-direct support.

www.MyTana.com ■ (800) 328-8170

M30 Specs

SYSTEM OVERVIEW	
TYPE	Portable, cart jetter
LINE SIZE	1.5" - 6" (with 1/4" and 3/8" hose)
WORKING PRESSURE @ PUMP	Up to 3,000 psi
FLOW RATE	4.5 gpm
APPLICATION type of blockage	All obstructions with specialty nozzle selection
MOTOR	
TYPE	Gas (Honda iGX series) 3 year warranty
POWER (HP/CC)	11.7 hp / 390 CC
STARTER/RECHARGE	Electric, key 10 amp recharger built-in Auto choke
MOTOR/PUMP COUPLING	Direct drive
CART FRAME	
STYLE	Pump and motor housed on transport cart that holds hose reel Hose reel is removable, has attachable stand
FINISH	Steel, powder-coat finish
WHEELS	Smooth tread pneumatic – rear: (2) 10" – front: (2) 3" swivel w/locking casters
OPERATING WEIGHT	190 lbs
DIMENSIONS	21" w x 32" d x 48" h

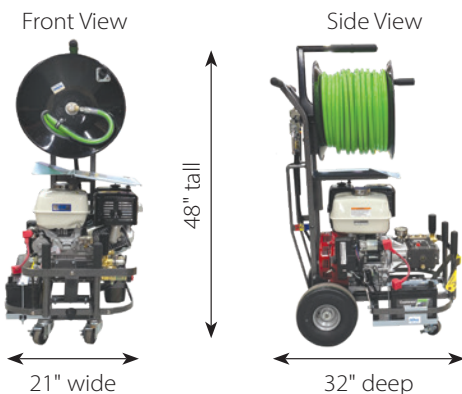

PUMP	
TYPE / HEAD	Triplex Ceramic plunger Brass head (nickel plated)
FILTER	Replaceable – available online
MAX WATER TEMP	140° HotBox allows 180°, downstream from pump
HOSE REEL Optional with base purchase	
MAIN REEL CAPACITY	200' of 3/8" jetter hose
FEATURES	Ball valve on reel Removeable, mates with reel stand for remote jetting Quick disconnect fitting Hand crank
HOSE Optional with base purchase	
BRAND	Piranha®
MATERIAL	Reinforced thermoplastic tube Abrasion resistant, polyurethane jacket
WORKING PRESSURE	4,000
BURST PRESSURE	12,000
TEMP RATING	150° (140° w/ pump)
REQUIRED FOR OPERATION	
WATER SOURCE	Household supply at 4.5 gpm (min. 5/8" garden hose)

ADDITIONAL FEATURES

Motor

1.6 gal fuel tank
Low-oil shut off
Automatic throttle down
Thermal protection

Pump

Pressure regulator / unloader with heavy duty gauge
Pulse valve control
Thermal protection

Frame

Balanced Weight
Easy tilt (up to 30°)
Removable splash guard shield over motor
Stair glides



Learn more

See the M30 online at mytana.com/product/m30



010324

(800) 328-8170
M-F | 7a to 5p CST

[MyTana.com](https://mytana.com)

EMAIL mytana@idexcorp.com



youtube.com/videoMyTana

MYTANA LLC 746 SELBY AVE • ST. PAUL, MN 55104