



M30 MaxBlast Gas Jetter

Get more power—and range—without sacrificing maneuverability. A reliable Honda motor lets the pump deliver up to 4.5 gpm @ 3,000 psi. Removable reel allows remote jetting, attach a rotating nozzle and take on roots.

- **Automatic throttle down and auto choke** help the motor run efficiently, EZ start by-pass.
- **Durable AR pump** has thermal protection and pulse control valve.
- **Removable splash shield** allows access to motor and protects it from drips.
- **Removable reel** with ball valve flow control mounts onto stand to carry inside for indoor jetting.



We design all our jetters so they are easy to load, easy to maneuver, easy to maintain and easy to use.



Powerful. Reliable. Maneuverable.

www.MyTana.com ■ (800) 328-8170

M30 At-a-glance

LINE SIZE 1½" - 6"

MOTOR Gas - 390 cc
w/ electric start

PUMP 4.5 gpm @ 3,000 psi

HOSE 3/8" x 200', 1/8" x 75'

All MyTana portable jetters feature:

QUALITY, RELIABLE PUMPS AND MOTORS with thermal protection and accessible controls

PULSE VALVES on all pumps


RUGGED FRAMES which emphasize ergonomics, portability, maneuverability, and stabilization during operation

EASY MAINTENANCE on all components (parts are available for field repairs)



M30 Specs

SYSTEM OVERVIEW	
TYPE	Portable, cart jetter
LINE SIZE	1.5" - 6" (with 1/8" and 3/8" hose)
WORKING PRESSURE @ pump	Up to 3,000 psi <i>Keep nozzles clean and use spec size/length of hose to maximize pressure at the nozzle</i>
FLOW RATE	4.5 gpm
APPLICATION type of blockage	All obstructions with specialty nozzle selection
MOTOR	
TYPE	Gas (Honda iGX series) 3 year warranty
POWER	11.7 hp / 390 CC
STARTER/RECHARGE	Electric, key 10 amp recharger built-in Auto choke
MOTOR/PUMP COUPLING	Direct drive
CART FRAME	
STYLE	Push – pump, motor and hose all housed on transport cart Hose reel is removable, has attachable stand with carry handle
CONSTRUCTION	Steel, powder-coat finish
WHEELS	Smooth tread pneumatic – rear: (2) 10" – front: (2) 3" swivel w/locking casters
OPERATING WEIGHT	190 lbs
DIMENSIONS	21" w x 32" d x 48" h

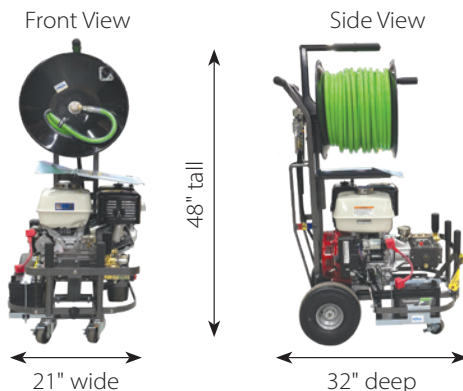

PUMP	
TYPE / HEAD	Triplex Ceramic plunger Brass head (nickel plated)
FILTER	Replaceable – available online
FEATURES	Pressure regulator / unloader Pulse valve control Thermal protection
MAX WATER TEMP	140°
HOSE REEL	
FEATURES	Ball valve on reel Removable, mounts onto reel stand for remote jetting Quick disconnect fitting Hand crank
HOSE	
INCLUDED Piranha® brand	3/8" NPT x 200 ft 1/8" NPT x 75 ft
MATERIAL	Reinforced thermoplastic tube Abrasion resistant, polyurethane jacket
WORKING PRESSURE	4,000
BURST PRESSURE	12,000
TEMP RATING	150° (140° w/ pump)
REQUIRED FOR OPERATION	
WATER SOURCE	Household supply at 4.5 gpm (min. 5/8" garden hose)

ADDITIONAL FEATURES

Motor

1.6 gal fuel tank
Low-oil shut off
Automatic throttle down
Thermal protection

Frame

Balanced Weight
Easy tilt (up to 30°)
Removable splash guard shield over motor
Stair glides

Also included

Reel stand
50' jumper hose

Nozzle Kit

Get an optional M30 nozzle kit, see MyTana.com.



Learn more

See the M30 online at mytana.com/product/m30



(800) 328-8170
M-F | 7a to 5p CST

MyTana.com

EMAIL mytana@idexcorp.com



youtube.com/videoMyTana

MYTANA LLC 746 SELBY AVE • ST. PAUL, MN 55104