

Powerful. Reliable. Maneuverable.

M20

FastBlast Electric Jetter



The M20 FastBlast is a versatile jetter that includes a transport cart so you can move the jetter with larger or longer hose in one trip. Customize it with $\frac{1}{8}$ " hose and $\frac{1}{4}$ " hose with reel and be ready for jobs in up to 4" lines. Can be used with 15 amp circuits.

- **2 HP industrial motor** powers up to 1,500 psi cleaning pressure and pulling for smaller lines
- **Quality, durable pump** has thermal protection, pulse valve assists in bends and blockages.
- **Ball valve** on reel controls water flow.
- **Remove pump/motor unit** to get into tighter spaces.

The M20 is ideal for opening grease-choked or frozen lines. Made in the USA with factory-direct support.



www.MyTana.com ■ (800) 328-8170

MyTana Jetter Standards

Industrial pump and motor with protection and accessible controls

Anti-vibration

Can be customized

Complete nozzle selection

Factory direct support


Parts selection available online for field repairs

QUICK VIEW M20

LINE SIZE	1 ½" - 4"
MOTOR	2 HP electric
PUMP	2.1 gpm @ 1,500 psi

M20 Specs

SYSTEM OVERVIEW	
TYPE	Portable, cart and/or hand carry
LINE SIZE	1.5" - 4" (with 1/8" and 1/4" hose)
WORKING PRESSURE @ PUMP	Up to 1,500 (with 20 amp circuit)
FLOW RATE	2.1 gpm
APPLICATION type of blockage	General cleaning, ice, softer obstructions, grease, soap
MOTOR	
TYPE	Electric Industrial grade
POWER (HP)	2 hp – 20 amp required for 1,500 psi – 15 amp suitable for 1,200+ psi
STARTER	Toggle switch Water proof
MOTOR/PUMP COUPLING	Direct drive
CART FRAME	
STYLE	Combination – pump and motor are mounted on removeable tray frame with carry handle – wheeled transport cart has hose reel
FINISH	Steel, powder-coat
WHEELS	Smooth tread pneumatic – rear: (2) 10" – front: (2) 3" swivel w/locking casters
OPERATING WEIGHT	128 lbs
DIMENSIONS	20" w x 32" d x 39" h

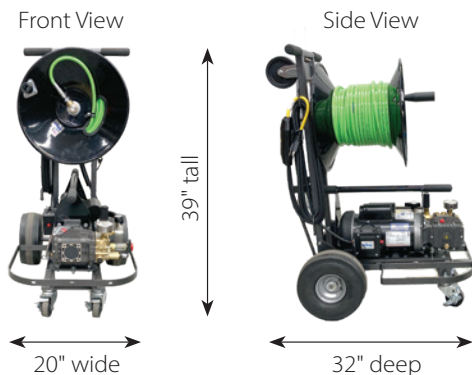

PUMP	
TYPE / HEAD	Triplex Ceramic plunger Forged brass head
FILTER	Replaceable – available online
MAX WATER TEMP	140°
HOSE REEL Optional with base purchase	
MAIN REEL CAPACITY	115' of 1/4" jetter hose
FEATURES	Ball valve on reel Removable Quick disconnect fitting Hand crank
HOSE Optional with base purchase	
BRAND	Piranha®
MATERIAL	Reinforced thermoplastic tube Abrasion resistant polyurethane cover
WORKING PRESSURE	4,000
BURST PRESSURE	12,000
TEMP RATING	150° (140° w/ pump)
REQUIRED FOR OPERATION	
POWER SOURCE	20 amp preferred 15 amp acceptable (1,200+ psi) relieve pressure before start up
WATER SOURCE	Household supply at 2.1 gpm (min. 5/8" garden hose)

ADDITIONAL FEATURES

Motor	Pump	Frame
25 ft power cord	Pressure regulator / unloader with heavy duty gauge	Balanced Weight
Inline GFCI	Pulse valve control	Easy tilt
Thermal protection	Thermal protection	Loading wheel
	Removable from cart	Cord wrap
		Stair glides



Learn more

See the M20 online at
mytana.com/product/m20-jetter