



M888 Upright Workhorse

Maximize power and portability with the M888. The upright design puts the transport handle at operator height and the compact size gets into tight spaces. The gearbox can push cable out 400'. Other features include:

- **Autofeed-Retriever** is included.
- **Easy reel change** lets you can quickly add additional lengths of cable with only a hex key tool.
- **Built in stair glides** assist with transport and flip down to lock wheels while in use.

We carry a full line of cable, blades and attachments as well as parts. The M888 can be easily maintained or repaired in the field or in your shop.



M888 At-a-glance

LINE SIZE 3" - 10"

MOTOR 1/2 hp electric, gearbox drive

SPEED 150 rpm

BASE WT 117 lbs (no cable)

All MyTana cable machines feature:

OPERATOR SAFETY features such as electrical protection

RUGGED FRAMES which emphasize ergonomics, portability, maneuverability, and stabilization during operation

QUIET OPERATION for residential use

CUSTOMIZABLE cable, fitting and reel styles, optional add-ons

Rugged Workhorses. Built to Last.


Made in the USA with factory-direct support.

Shown equipped with 3/4" cable in a closed poly reel


www.MyTana.com ■ (800) 328-8170

M888 Specs

SYSTEM OVERVIEW	
LINE SIZE	3" - 10"
CUSTOMIZATION OPTIONS	Add cable (size, length and style variations) Reel style variations
CONTROL	Heavy duty on-off switch Autofeed Foot pedal Reverse switch for jams
BASE: MOTOR	
TYPE	1/2 hp heavy-duty electric Capacitor start
DRIVE MECHANISM	Gearbox (steel gears)
SAFETY	GFCI Watertight electrical
BASE: FRAME	
FRAME STYLE	Upright – rolling frame
FINISH	Steel, powder-coated
WHEELS	10" pneumatic, locking
OPERATING WEIGHT	117 lbs (no cable) 270 lbs (125' wire core cable reel)
DIMENSIONS	26" w x 35" d x 47" h

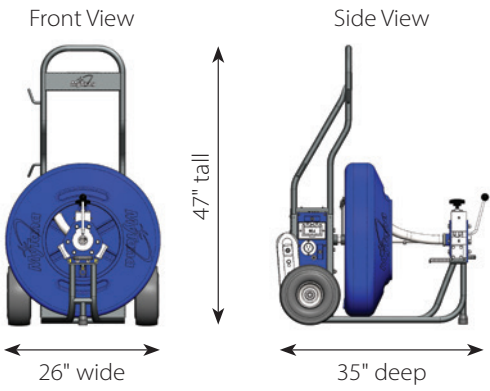

CABLE REEL and REVOLVING ARM Optional with base purchase	
CONSTRUCTION	Open or closed options – open steel cage: aids drainage and cleanup, power wash clean, includes acid resistant cover to contain debris on job site – closed polyethylene reel: has drainage hole, helps to contain splatter
INNER DRUM	No
RPM REEL	150 RPMs
CABLE Optional with base purchase	
SIZE AND LENGTH with standard reel	1 1/16" or 3/4" – 100' or 125' – includes 5' back end cable and 3' super flex leader
MATERIAL	Premium grade steel Precision-wound, high-tensile music wire Rust resistant
CORE	Hollow-core or wire-core
FITTINGS	Threaded ME , slip-joint SJ , General GE , interlock'g IL or Ridgid RE



- INCLUDES** – Foot pedal, hose and switch
- REQUIRED FOR OPERATION** – Heavy duty extension cord

ADDITIONAL FEATURES

Motor	Frame	
Gear driven power	Balanced weight with easy tilt	Pneumatic tires
Auxiliary outlet – power source for add'l tools on job site	Anti-skid feet	Easy reel change
	Stair glides	Locking wheels

Cable Reel Cart Optional

Easy loading and transport of large, mainline cable reels. Rugged steel frame construction relieves strain on your back and shoulders.

- 8" pneumatic tires deliver a smooth ride
- Ratcheting locking strap secures the cable over rougher terrain
- Built-in stair glides
- Loading wheel



Learn more
See the M888 online at mytana.com/product/m888

